

SPECIFICATIONS

USB-6009

8 AI (14-Bit, 48 kS/s), 2 AO (150 Hz), 13 DIO USB Multifunction I/O Device

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

The following characteristic specifications describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are *Typical* unless otherwise noted.

Conditions

Specifications are valid at 25 °C unless otherwise noted.

Analog Input

Analog inputs

| | |
|---------------------------------|----------------------------|
| Differential | 4 |
| Single-ended | 8, software-selectable |
| Input resolution | |
| Differential | 14 bits |
| Single-ended | 13 bits |
| Maximum sample rate (aggregate) | 48 kS/s, system dependent |
| Converter type | Successive approximation |
| AI FIFO | 512 bytes |
| Timing resolution | 41.67 ns (24 MHz timebase) |

| | |
|---------------------------------------|--|
| Timing accuracy | 100 ppm of actual sample rate |
| Input range | |
| Differential | $\pm 20\text{ V}^1$, $\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 4\text{ V}$, $\pm 2.5\text{ V}$, $\pm 2\text{ V}$, $\pm 1.25\text{ V}$, $\pm 1\text{ V}$ |
| Single-ended | $\pm 10\text{ V}$ |
| Working voltage | $\pm 10\text{ V}$ |
| Input impedance | 144 k Ω |
| Overvoltage protection | $\pm 35\text{ V}$ |
| Trigger source | Software or external digital trigger |
| System noise ² | |
| Differential | |
| $\pm 20\text{ V}$ range | 5 mV _{rms} |
| $\pm 1\text{ V}$ range | 0.5 mV _{rms} |
| Single-ended, $\pm 10\text{ V}$ range | 5 mV _{rms} |

Table 1. Absolute Accuracy at Full Scale, Differential

| Range (V) | Typical at 25 °C (mV) | Maximum over Temperature (mV) |
|------------|-----------------------|-------------------------------|
| ± 20 | 14.7 | 138 |
| ± 10 | 7.73 | 84.8 |
| ± 5 | 4.28 | 58.4 |
| ± 4 | 3.59 | 53.1 |
| ± 2.5 | 2.56 | 45.1 |
| ± 2 | 2.21 | 42.5 |
| ± 1.25 | 1.70 | 38.9 |
| ± 1 | 1.53 | 37.5 |



Note Input voltages may not exceed the working voltage range.

¹ $\pm 20\text{ V}$ means that $|AI^+ - (AI^-)| \leq 20\text{ V}$. However, AI^+ and AI^- must both be within $\pm 10\text{ V}$ of GND. Refer to the *Taking Differential Measurements* section of the *NI USB-6008/6009 User Guide* for more information.

² System noise measured at maximum sample rate.

Table 2. Absolute Accuracy at Full Scale, Single-Ended

| Range (V) | Typical at 25 °C (mV) | Maximum over Temperature (mV) |
|-----------|-----------------------|-------------------------------|
| ±10 | 14.7 | 138 |

Analog Output

| | |
|-----------------------------|------------------------|
| Analog outputs | 2 |
| Output resolution | 12 bits |
| Maximum update rate | 150 Hz, software-timed |
| Output range | 0 V to +5 V |
| Output impedance | 50 Ω |
| Output current drive | 5 mA |
| Power-on state | 0 V |
| Slew rate | 1 V/μs |
| Short circuit current | 50 mA |
| Absolute accuracy (no load) | |
| Typical | 7 mV |
| Maximum at full scale | 36.4 mV |

Digital I/O

| | |
|---------------------------------|--|
| Digital I/O lines | |
| P0.<0..7> | 8 lines |
| P1.<0..3> | 4 lines |
| Direction control | Each channel individually programmable as input or output |
| Output driver type ³ | Each channel individually programmable as open collector or active drive |
| Compatibility | TTL, LVTTTL, CMOS |
| Absolute maximum voltage range | -0.5 V to 5.8 V with respect to GND |

³ This document uses NI-DAQmx naming conventions. Open-drain is called open collector and push-pull is called active drive.

Pull-up resistor 4.7 kΩ to 5 V

Power-on state Input

Table 3. Digital Logic Levels

| Level | Minimum | Maximum |
|---|---------|---------|
| Input low voltage | -0.3 V | 0.8 V |
| Input high voltage | 2.0 V | 5.8 V |
| Input leakage current | — | 50 μA |
| Output low voltage (I = 8.5 mA) | — | 0.8 V |
| Output high voltage, active drive (I = -8.5 mA) | 2.0 V | 3.5 V |
| Output high voltage, open collector (I = -0.6 mA, nominal) | 2.0 V | 5.0 V |
| Output high voltage, open collector (I = -8.5 mA, with external pull-up resistor) | 2.0 V | — |

External Voltage

+5 V output (200 mA maximum)

Minimum +4.85 V

Typical +5 V

+2.5 V output (1 mA maximum) +2.5 V

+2.5 V accuracy 0.25% maximum

Reference temperature drift 50 ppm/°C maximum

Event Counter

Number of counters 1

Resolution 32 bits

Counter measurements Edge counting (falling-edge)

Counter direction Count up

Pull-up resistor 4.7 kΩ to 5 V

Maximum input frequency 5 MHz

Minimum high pulse width 100 ns

Minimum low pulse width 100 ns

| | |
|--------------------|-------|
| Input high voltage | 2.0 V |
| Input low voltage | 0.8 V |

Bus Interface

| | |
|-------------------|------------------------------|
| USB specification | USB 2.0 full-speed (12 Mb/s) |
|-------------------|------------------------------|

Power Requirements

USB, 4.10 VDC to 5.25 VDC

| | |
|-------------|-------------|
| Typical | 80 mA |
| Maximum | 500 mA |
| USB suspend | |
| Typical | 300 μ A |
| Maximum | 500 μ A |

Physical Characteristics

Dimensions

| | |
|--------------------|---|
| Without connectors | 63.5 mm \times 85.1 mm \times 23.2 mm (2.50 in. \times 3.35 in. \times 0.91 in.) |
| With connectors | 81.8 mm \times 85.1 mm \times 23.2 mm (3.22 in. \times 3.35 in. \times 0.91 in.) |

Weight

| | |
|--------------------|---------------|
| Without connectors | 54 g (1.9 oz) |
| With connectors | 84 g (3 oz) |


| | |
|---------------|-----------------------------|
| USB connector | USB series B receptacle (1) |
|---------------|-----------------------------|

I/O connectors

| | |
|----------------------------|--|
| Type | 16-position screw terminal plugs (2) |
| Screw-terminal wiring | 16 AWG to 28 AWG |
| Torque for screw terminals | 0.22 N \cdot m to 0.25 N \cdot m (2.0 lb \cdot in. to 2.2 lb \cdot in.) |

If you need to clean the module, wipe it with a dry towel.

Figure 1. USB-6009 Dimensions

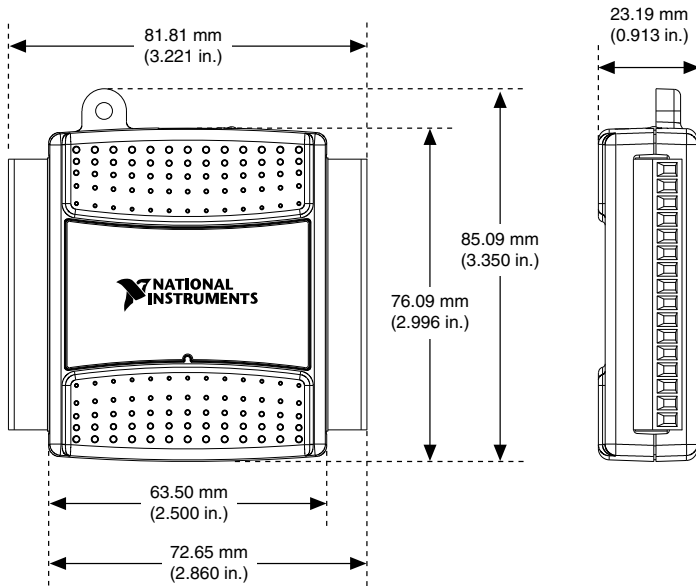

Safety Voltages

Connect only voltages that are within these limits.

Channel-to-GND

±30 V max, Measurement Category I

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics



Caution Do not use this module for connection to signals or for measurements within Measurement Categories II, III, or IV



Note Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Environmental

Temperature (IEC 60068-2-1 and IEC 60068-2-2)

| | |
|-----------|-----------------|
| Operating | 0 °C to 55 °C |
| Storage | -40 °C to 85 °C |

Humidity (IEC 60068-2-56)

| | |
|-----------|--------------------------------|
| Operating | 5% RH to 95% RH, noncondensing |
| Storage | 5% RH to 90% RH, noncondensing |

Pollution Degree (IEC 60664)

2

Maximum altitude

2,000 m

Indoor use only.

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations and certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers This symbol indicates that waste products should be disposed of separately from municipal household waste according to WEEE Directive 2002/96/EC of the European Parliament and the Council on waste electrical and electronic equipment (WEEE). All products at the end of their life cycle must be sent to a WEEE collection and recycling center. Proper WEEE disposal reduces environmental impact and the risk to human health due to potentially hazardous substances used in such equipment. Your cooperation in proper WEEE disposal will contribute to the effective usage of natural resources. For information about the available collection and recycling scheme in a particular country, go to ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2015—2017 National Instruments. All rights reserved.

375296C-01 September 1, 2017