



SPECIFICATION	NAME	FLOAT-SWITCH	SPEC.No.	O	T	N	K	F
	DATE	Sept.14,2018	F-					

AGENT				
-------	--	--	--	--

USER		ADDRESS	
------	--	---------	--

※ EXPRESS SPECIFICATION BY  MARK AS FOLLOWS

1	MATTER	NAME	<input type="checkbox"/>
2		SPECIFIC-GRAVITY	<input type="checkbox"/>
3		VISCOSITY	<input type="checkbox"/> Pa·s
4		DENSITY	<input type="checkbox"/> %
5		PH	<input type="checkbox"/>
6	USING CONDITIONS	TEMPERATURE	INNER-TANK ENVIRONMENT max. 120 °C
7		PRESSURE	<input type="checkbox"/> + <input type="checkbox"/> - <input type="checkbox"/> kPa <input checked="" type="checkbox"/> ATM
8		VIBRATION	<input checked="" type="checkbox"/> NO
9	PERFORMANCE	MODEL	KF-322-3
10		QUANTITY	1 SETS
11		OUTPUT CONTACT-CAPACITY	<input checked="" type="checkbox"/> AC 60VA <input type="checkbox"/> AC100VA
12		COLOR	<input checked="" type="checkbox"/> GOLD <input type="checkbox"/>
13	FLANGE	JIS10K50A	
		φD	φ 155 mm
		P.C.D	120 mm
		N-φh	4-φ19 mm
		t	16 mm

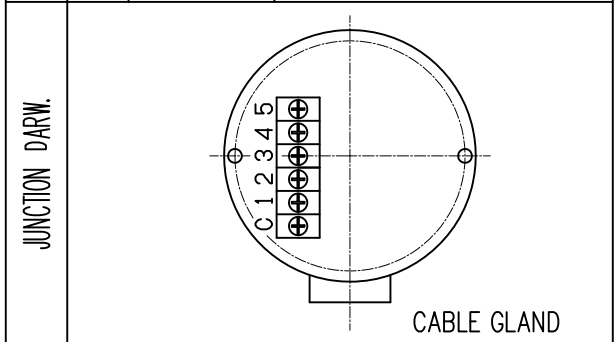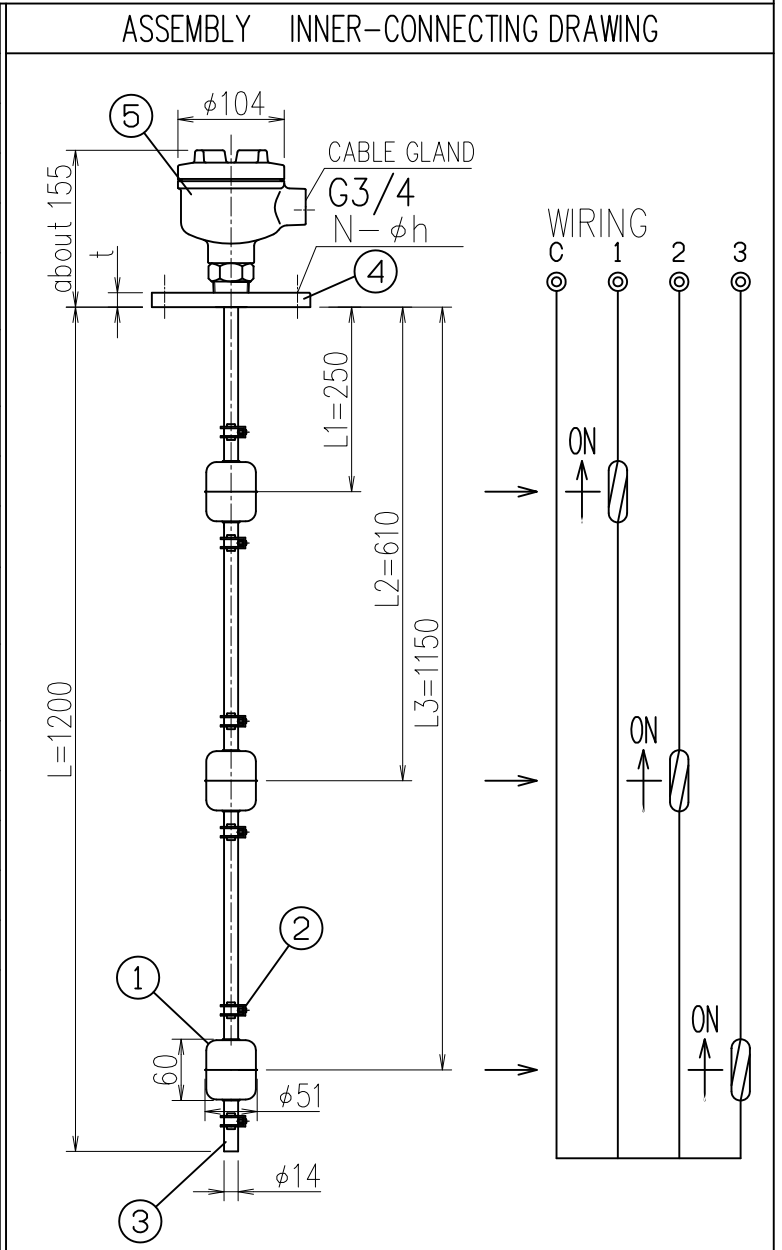

5	JUNCTION BOX	AC	1
4	FLANGE	<input type="checkbox"/> SS400 <input checked="" type="checkbox"/> SUS304 <input type="checkbox"/> SUS316L	1
3	STEM	<input checked="" type="checkbox"/> SUS304 <input type="checkbox"/> SUS316 <input type="checkbox"/> SUS316L	1
2	STOPPER	<input checked="" type="checkbox"/> SUS304 <input type="checkbox"/> SUS316 <input type="checkbox"/> SUS316L	6
1	FLOAT	SUS316L	3
No.	NAME	MATERIAL	QUANTITY

OPTION	
--------	--